



PAS68 Static Bollards (30,40 & 50mph)



Product Summary

Eagle Automation have a full and wide range of PAS68 tested static bollards including the worlds first surface mount bollard, ultra shallow foundation bollard, a shallow foundation single unit bollard and mid depth foundation bollards. We also offer a range of different diameters with many of our bollards having removable options. This includes:

Model APT20SH

A zero penetration super slim shallow foundation bollard with a 159mm diameter tested with the N1 3.5 ton vehicle at 48kph.

Model APT30SM

The worlds only surface mounted bolt down bollard tested with the N2 7.5 ton vehicle at 48kph. This can be bolted to existing concrete bases and suspended slabs.

Model APT30SH

This shallow foundation bollard has been nicknamed "bollard in a box" as this is the only bollard on the market that is supplied complete with integral re-bar. It was also the first

PAS68 Static Bollards (30,40 & 50mph)

shallow static bollard to be tested as a single unit with single foundation. This bollard was tested with the N2 7.5 ton vehicle at 48kph.

Model APT30ST

With options for both a 193mm and 219mm bollard, these have been tested with the N2 7.5ton vehicle at 48kph.

Model APT40SH

This is our super shallow foundation bollard requiring just 125mm depth. A 219mm or 273mm bollard can be used with this product. It has been tested with the N2 7.5ton vehicle at 64kph.

Model APT40ST


With options for both a 219mm and 273mm bollard, these have been tested with the N2 7.5ton vehicle at 64kph.

Model APT50ST

This bollard has a diameter of 273mm and has been tested with both the N2 and N3 7.5ton vehicle at 80kph.



APT30SH
Shallow foundation "bollard in a box"

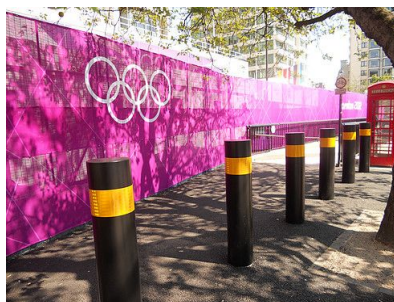

APT30SM
Surface mount bolt down bollard



APT40SH
Super shallow foundation bollard