




## LPS1175 & High Security Turnstiles

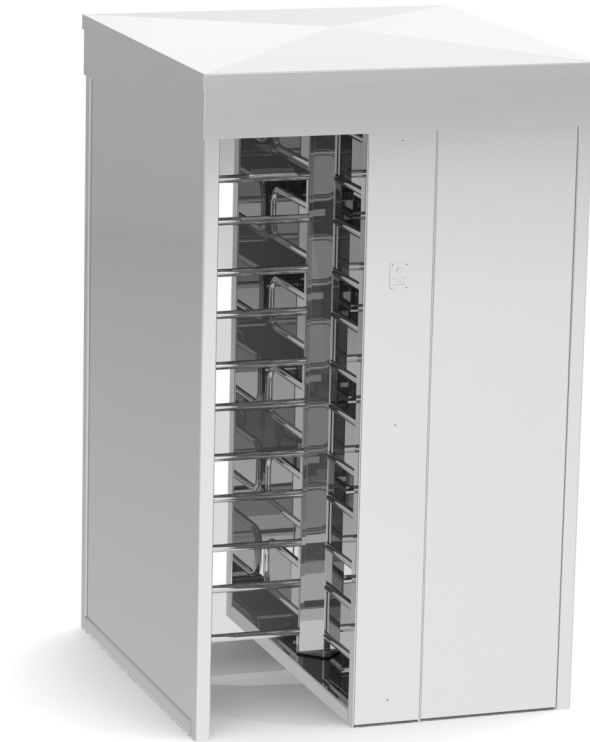

### Product Summary

Independently Certified to LPCB Issue 8. Cert No 1572 Full Height Single Security Turnstile. A1 (SR1) to D10 (SR4) inclusive. Full Height Double Security Turnstile. A1 (SR1) to C5 (SR3) inclusive.

SR1, SR2, SR3 and SR4 externally accredited to LPS1175: Issue 7 certificate 1495a  
Available as double units (SR1 SR3 only)

90 degree Locking head mechanism, electrically released in both directions

Rotor sensing relays to provide a voltage free contact following the rotation of the rotor in either direction

Status light LED panels to indicate when to proceed

240V AC mains supply 2 amp





## LPS1175 & High Security Turnstiles

### Key features

- 90 Locking head mechanism, electrically released in both directions
- Rotor sensing relays to provide a voltage free contact following the rotation of the rotor in either direction
- Status light LED panels to indicate when to proceed
- 240V AC mains supply 2 amp
- Fail locked on power failure
- Walkway canopy with down light
- Side panels clad in galvanised weld mesh (SR2-SR4): this is see through for CCTV
- Bolts directly onto concrete base
- Finish powder coated standard RAL colour
- Can be assembled on site, if delivered flat pack
- Refer to individual drawings for more information

### Specification

- Single turnstiles (W 1,350mm D 1,330mm)
- A1: 1491-201-S straight bar rotor arms
- A1: 1491-201-H SR1 Hooped bar rotor arms
- B3: 1491-202-SF SR2 straight bar filled rotor arms
- B3: 1491-202-HF SR2 Hooped bar rotor paddles
- C5: 1491-203-SFA SR3 Straight Bar filled armor rotor arms
- C5: 1491-203-HFA SR3 Hooped Bar filled sheet and armor rotor paddles
- D10 1491-204-HFA SR4 Hooped D Bar filled armor shaped rotor paddles