




PAS68 Static Bollards – APT30SM



Eagle Automation have a full and wide range of PAS68 tested bollards. Our static bollard range includes the world's first surface mount bollard – 30SM, an ultra-shallow foundation bollard – 40SH, a shallow foundation single unit bollard – 30SH and mid depth foundation bollards – 30/40/50ST. We also offer a range of different diameters with many of our bollards having removable options. Automated products include full depth & shallow foundation rising bollards with Zero penetration at 30mph – 30A, 30AT, and a full depth 50mph bollard – 50A.

- PAS68: V/7500[N2]/48/90:5.5/0.0
- Bollard tested with N2 7.5ton vehicle at 30mph / 48kmh
- Diameter: 219mm
- Height: min 800mm above FFL
- Finish: Painted / Optional Stainless Steel Sleeve
- Foundation: Surface fixed to existing slab (>100mm), 70mm anchor depth
- Static fixed bollard
- Removable option requires additional depth for socket

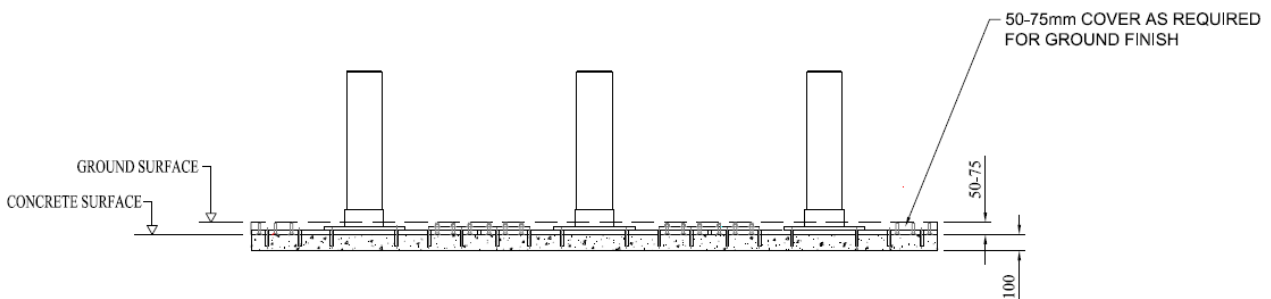

Raising Standards
Safety Assured

